

Common Mode Inductors – CCMS400 Series



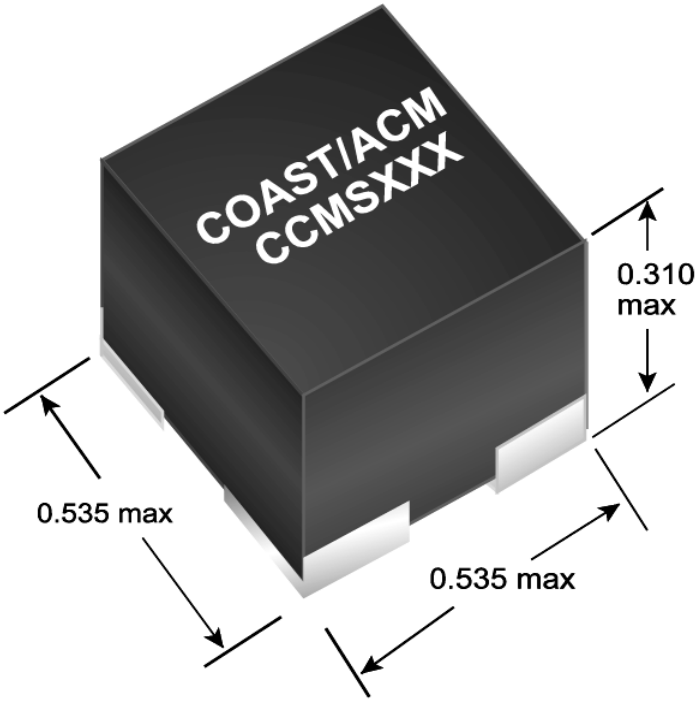


BACK-SIDE VIEW




IN	MM
0.565	14.35
0.535	13.59
0.345	8.76
0.310	7.87
0.220	5.59
0.200	5.08
0.025	0.64
0.010	0.25


SIDE VIEW



BOTTOM VIEW



RECOMMENDED MOUNTING PAD CIRCUIT SIDE



SPECIFICATIONS

- **Inductance:** 0.059 mH to 7.2 mH
- **Operating Temperature:** -55°C to +125°C
- **Storage Temperature:** -60°C to +130°C
- **Standard Termination Finish:** Tin-lead
- **Weight:** 35.4 gram, maximum

FEATURES

- Transfer Molded Package
- Marking: Laser or Ink
- Leadless device for minimum footprint
- Internal Welded Terminations
- Low EMI Radiation
- Low Thermal Expansion permits mounting on most substrate materials
- Tape and Reel Packaging available (additional charge)
  - Full Reel Quantity (Small): 125 pieces
  - Full Reel Quantity (Large): 300 pieces
- Available for Military Application per MIL-PRF-27 (see CMS400 Series)
- Available for Space Application per MIL-STD-981 (see SCMS400 Series)

APPLICATIONS

Designed for optimal performance in commercial applications, these inductors ensure consistent electrical behavior, maintaining signal integrity and reducing interference

Suitable for telecommunications, consumer electronics, and industrial automation, they offer both reliability and precision. Robust construction ensures longevity, positioning these inductors as a preferred choice for diverse commercial endeavors

PART IDENTIFYING NUMBER

CCMS001

Coast/ACM Part Number

K: Inductance Tolerance

M: ±20% K: ±10% J: ±5%

Common Mode Inductors – CCMS400 Series

Part Number	Inductance Min (mH)	DCR (max) ohms	Current Rated Max (A)
CCMS401	0.059	0.04	3.4
CCMS402	0.105	0.05	3.3
CCMS403	0.165	0.06	3.0
CCMS404	0.325	0.07	2.6
CCMS405	0.535	0.08	2.4
CCMS406	0.95	0.15	1.9
CCMS407	1.50	0.25	1.4
CCMS408	1.90	0.25	1.4
CCMS409	2.90	0.35	1.2
CCMS410	3.50	0.45	1.0
CCMS411	5.00	0.55	0.9
CCMS412	7.20	0.60	0.8