

Current Transformers – CCTS200 Series



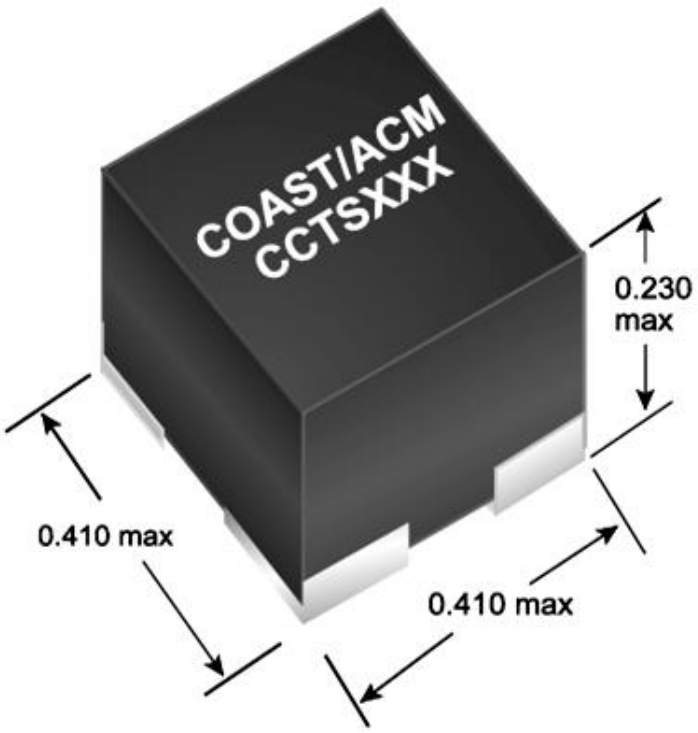


BACK-SIDE VIEW




IN	MM
0.440	11.18
0.410	10.41
0.285	7.24
0.230	5.84
0.155	3.94
0.135	3.43
0.025	0.64
0.010	0.25


SIDE VIEW



BOTTOM VIEW



RECOMMENDED MOUNTING PAD CIRCUIT SIDE



SPECIFICATIONS

- **Operating Temperature:** -55°C to +125°C
- **Storage Temperature:** -60°C to +130°C
- **Standard Termination Finish:** Tin-lead
- **Weight:** 35.4 gram, maximum

FEATURES

- Transfer Molded Package
- Marking: Laser or Ink
- Leadless device for minimum footprint
- Internal Welded Terminations
- Low EMI Radiation
- Low Thermal Expansion permits mounting on most substrate materials
- Tape and Reel Packaging available (additional charge)
  - Full Reel Quantity (Small): 200 pieces
  - Full Reel Quantity (Large): 650 pieces
- Available for Military Application per MIL-PRF-27 (see CTS200 Series)
- Available for Space Application per MIL-STD-981 (see SCTS200 Series)

APPLICATIONS

Designed for optimal performance in commercial applications, these inductors ensure consistent electrical behavior, maintaining signal integrity and reducing interference

Suitable for telecommunications, consumer electronics, and industrial automation, they offer both reliability and precision. Robust construction ensures longevity, positioning these inductors as a preferred choice for diverse commercial endeavors

PART IDENTIFYING NUMBER

CCTS001

Coast/ACM Part Number

K: Inductance Tolerance

M: ±20% K: ±10% J: ±5%

Current Transformers – CCTS200 Series

Part Number	Current Peak Max (A)	Volt-Sec Min (v-µsec)	DCR Max (Ω)	Inductance Reference (mH)	Turns Ratio
CCTS201	10	40	1.20	4.40	1 : 50
CCTS202	10	40	1.50	8.90	1 : 100